

### PRODUCT DESCRIPTION

Paraseal Permanent Seam Tape is a 1.5 mm thick, rubberized SBS bitumen membrane laminated to a polyethylene reinforcing film. A removable release paper protects the adhesive membrane face until removed during installation.

### USAGE/PURPOSE

Paraseal Permanent Seam Tape is used primarily for sealing the seams of Paraseal applications. It is used on all HDPE facing seams of Paraseal and Paraseal LG. The inherent adhesive and waterproofing properties of the rubberized-bitumen membrane effectively seals the HDPE liner face on Paraseal products to render the bentonite a secondary waterproofing system.

### PACKAGING

- 100mm (W) x 22m (L) rolls.

### COLOUR

Black

### SHELF LIFE


24 months when stored as recommended in original unopened packaging.

### STORAGE

Store in a dry cool place in original unopened packaging.

### LIMITATIONS

- Not recommended in areas where membrane or permanent seam tape will be subject to continuous exposure to sunlight. Optimum results are obtained when tape is installed above 5°C and below 32°C.
- If stored in near 5°C, the product will not be as sticky and may struggle to adhere to the HDPE facer of Paraseal. Tremco recommends storing in a warm place, or heating the material using a hot air gun prior to application. DO NOT USE a torch to heat the membrane, as that will burn the reinforcing film and melt the bitumen.
- If stored near 32°C, the product will be very tacky and the contractor may struggle to install wrinkle free. Tremco recommends storing in a cooler or in the shade to cool the material down. Pressing the installed material with a "J-Roller" or a laminate floor roller will also help eliminate wrinkles during installation.

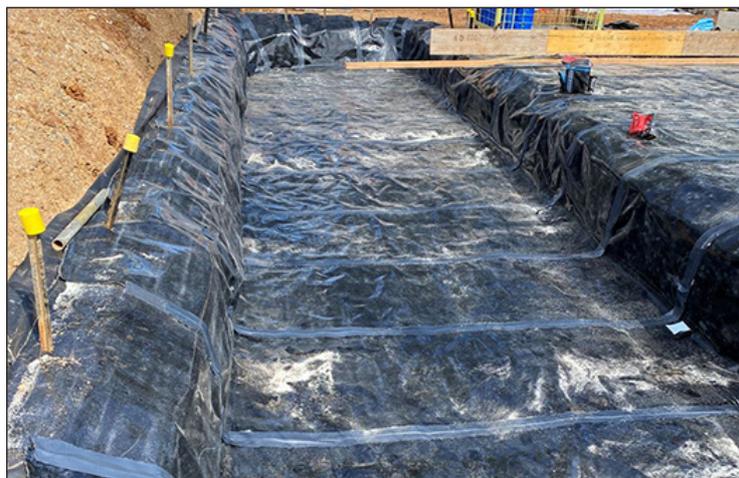

### HEALTH & SAFETY PRECAUTIONS

The Safety Data Sheet (SDS) must be read and understood prior to use.

### TECHNICAL SERVICE

Tremco CPG Australia Pty Ltd has a team of Representatives who provide assistance in the selection and specification of products. For more detailed information or service and advice, call Customer Service on (02) 9638 2755 or fax (02) 9638 2955.

### GUARANTEE/WARRANTY

Tremco CPG Australia Pty Ltd products are manufactured to rigid standards of quality. Any product which has been applied (a) in accordance with Tremco CPG Australia written instructions and (b) in any application recommended by Tremco CPG Australia, but which is proved to be defective, will be replaced free of charge.

Any information provided by Tremco CPG Australia in this document in relation to Tremco CPG Australia's goods or their use is given in good faith and is believed by Tremco CPG Australia to be appropriate and reliable. However, the information is provided as a guide only, as the actual use and application will vary with application conditions which are beyond our control. Tremco CPG Australia makes no representation, guarantee or warranty relating to the accuracy or reliability of the information and assumes no obligation or liability in connection with the information. To the extent permitted by law, all warranties, expressed or implied are excluded.

TYPICAL PHYSICAL PROPERTIES		
PROPERTY	TEST METHOD	PARASEAL PERMANENT SEAM TAPE
Tensile Strength	ASTM D412	1.7 MPa
Elongation	ASTM D412	350%
Resistance to Hydrostatic Water Pressure	ASTM D5385	Exceed 70 Metres

### CONTACT OUR TEAM

Tremco CPG Australia Pty Ltd  
 ABN: 25 000 024 064  
 Unit 12, 4 Southridge Street  
 Eastern Creek, NSW 2766

P: (02) 9638 2755

F: (02) 9638 2955

E: tremco@tremco.com.au